


CUSTOM PADS

Fax your diagram to: 508-285-2502 or email: brian@fullcirclepadding.com


HEAD END

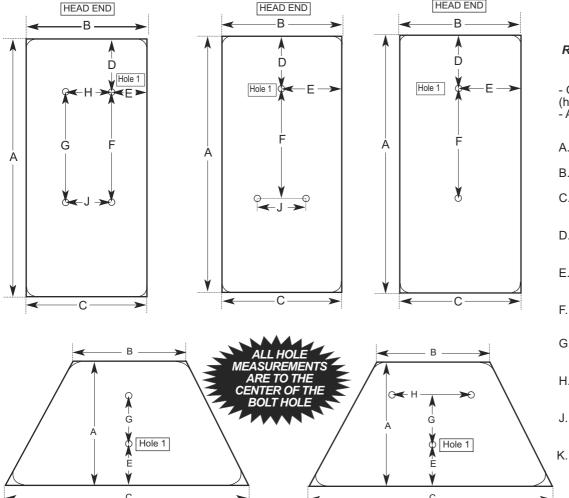


HOW TO MEASURE:

REMOVE PAD FROM MACHINE FOR ACCURATE HOLE PLACEMENT.

- Once pad is removed identify top (head end) of plywood.
- All measurements are in inches
- Actual length of wood
- В. Width of wood at (head end)
- 2nd width of wood if different than B.
- D. Distance from edge to center of first hole (hole 1)
- Distance from adjacent edge to E. center of first hole.
- Distance between holes (center to center)
- G. Distance between holes (center to center)
- Distance between holes (center to center)
- Distance between holes (center to center)
 - Foam size is 3/4", 1", 1-1/4", 1-1/2" and 2'
 - Do not include board thickness in your measurement. Standard plywood is 3/4"
 - Specify bolt diameter. 1/4", 5/16", 3/8"






Remove roller from the machine to get an accurate length.

- 1. Length of roller measure inner length.
- 2. Diameter of shaft roller rides on.
- 3. Outside diameter of roller.

Please measure and put dimensions on pad order sheet.

BOLT DIAMETER





CUSTOM PAD ORDER SHEET

Club Name:	.Phone Number:
Contact:	.Fax Number:
Address	.Email:
City, State, Zip:	.Customer ID:
Using the instructions on the previous page, please measure the pad for the measurements in the space provided. Please call with any question Email completed form to Brian@fullcir	
	Your diagram should have the measurements filled in like the samples below.
Manufacturer	
	HEAD END 10" 12" 12" 14" 15" 18" 18" 19" 19"
Manufacturer	